


# **TECHNICAL DATA SHEET**

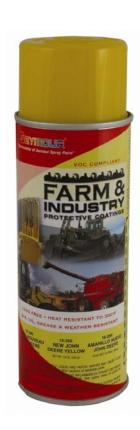

## **FARM AND INDUSTRY ENAMEL**

A heavy duty farm tractor and implement paint that is available in many popular manufacturer colors. This high solids formulation has excellent hiding qualities, protects against fading, and is heat and gas resistant. For maximum protection, a primer is recommended.

### **Suggested Uses:**

Restore antique tractors
Touch up rusted areas
Refinish farm implements
Paint Caterpillar, John Deere,
Allis Chalmers, International Harvestor,
and Case machinery

## Packaging:

Cans per case Shipping weight per case Container Label weight Shipping Classification Hazard Class

7 lbs. 16 fluid ounce can 12 ounces (340 grams) limited quantity, UN 1950

2 1

6

#### **Properties:**

Coverage Up to 15 square feet Cleanup Paint or lacquer thinner Extremely Flammable Flammability Flash point -4F 0.82 Specific Gravity Solids Content 33% MIR value 0.80, cannot exceed 0.95 HAPs content 15% Storage Temperature 40-100F Application Temperature 50-90F Durability Excellent Abrasion Resistance Good

Heat Resistance 300F Resin System High solids chain stopped alkyd

Yes

Shelf life Guaranteed for 2 years

Dry Time\*:

Tack free 30 minutes
To recoat Before 1 hour or
after 48 hours

\*At 72F, 50% humidity, 1.5 mil thickness

\*\*Curing/Recoat time is extended with multiple coats and excessively thick coats\*\*

**Gloss\*:** High Gloss, >85

\*as measured on a 60 degree gloss meter

#### **Available Colors:**

Gasoline Resistance

Part # Description UPC Code Part # Description UPC Code Allis Chalmers Orange 16-210 043281000345 16-242 Ford Blue 043281000390 043281000352 16-268 New John Deere Green 16-212 Old Equipment Yellow 043281000413 16-214 IHC Red 043281000376 16-272 Case Power Tan 043281005395 16-286 School Bus Yellow 043281000420

12-2-2021